

# LS1 Series

LED Linear Strip fixtures with simplified linking and integrated wiring that saves money and time when creating continuous rows of lighting.

## Applications

- Warehouses
- Industrial Facilities
- Manufacturing
- Parking Garages
- Retail



**Lumen Range**  
3,000 to 5,000 lm



**High Efficacy**  
up to 150 LPW



**Ultra-Long Life**  
L70 at 309,000 hours



**Easy Linking System**  
saves money and time

## Modular Design

4' linkable sections

## Mounting Options

Surface or suspended as stand-alone fixture

## Sensor Anywhere

Sensor can be placed anywhere along the run and operate all or part of the fixtures (LNK option)

## Dimming, Sensors & Controls

0-10V. Optional motion/daylight sensors

## Emergency Battery Backup

Optionally installed with 90 min. duration

## 5-year Warranty


10-year optional

## Product Offering

Nominal Lumens	Length	Lumen Output <sup>1</sup>	Efficacy	Watts	Part Number
3000	4 ft.	3704	150	25	LS10S-A1-03K-04-40-80-FR
4000	4 ft.	4835	145	33	LS10S-A1-04K-04-40-80-FR
5000	4 ft.	5898	140	42	LS10S-A1-05K-04-40-80-FR

<sup>1</sup>Typical at 277V (LV) and (25°C), 4000K/5000K, Frosted Lens, +/-10%. Typical CRI 80+. 3500K multiplier is 0.93.

## Linking Options and Sensor Anywhere

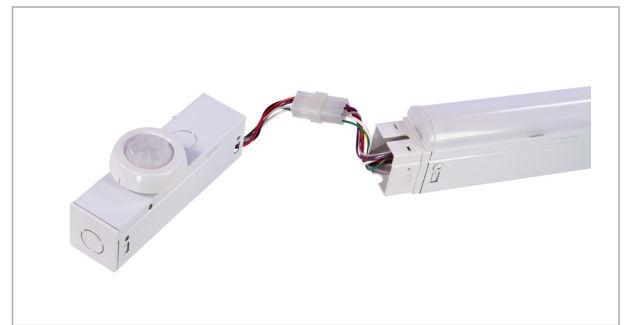

## Flex Lighting Solutions

(+1) 913-851-3000  
 lighting@flex.com  
 www.flexlightingsolutions.com

7320 W 162nd St.  
 Overland Park, KS  
 66085, USA

7825 Ridgepoint Dr.  
 Irving, TX  
 75063, USA

6201 America Center Dr.  
 San Jose, CA  
 95002, USA