

# TR1 Series

Indoor LED troffer designed to provide a soft, natural glow and uniform illumination, minimizing glare.

## Applications

- Schools & Universities
- Hospitals
- Offices
- Retail
- Airports



**Lumen Range**  
3,000 to 5,000 lm



**High Efficacy**  
up to 130LPW



**Long Life**  
L70 at 50,000 hours

## Stylish Troffer Design

Clean and Harmonious Design

## Mounting Options

Suspended / Recessed

## Dimming & Sensors


0-10V / IoT ready / Optional sensors

## Emergency Battery Backup

Optionally installed with 90 min. duration

## 5-year Warranty

## Product Offering

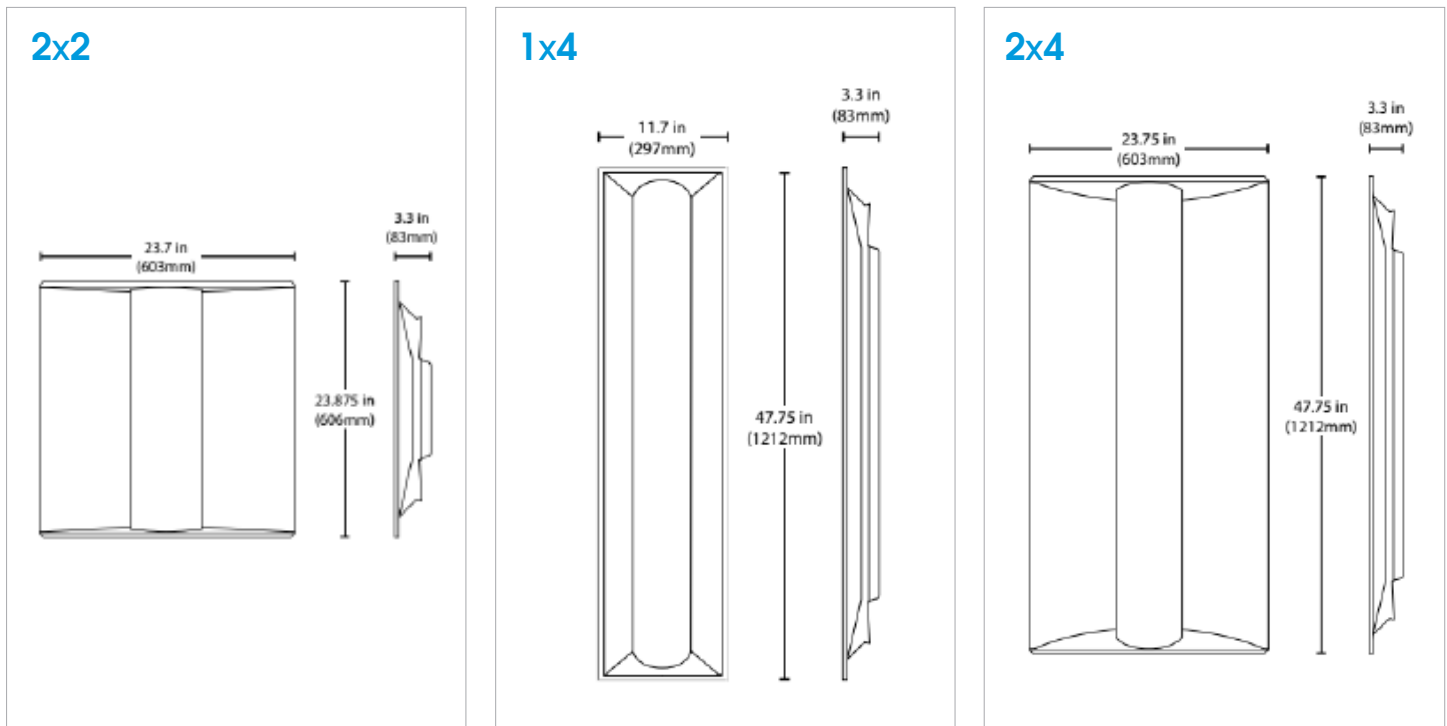

Nominal Lumens	Size	Lumen Output <sup>1</sup>	Efficacy	Watts	Part Number
3000	1x4	3200	126	25	TR10S-A1-03K-14-40-80-FR-LV-GRID-10V
3000	2x2	3200	125	25	TR10S-A1-03K-22-40-80-FR-LV-GRID-10V
4000	2x4	4200	120	35	TR10S-A1-04K-24-40-80-FR-LV-GRID-10V
5000	2x4	5200	130	40	TR10S-A1-05K-24-40-80-FR-LV-GRID-10V

<sup>1</sup>Typical at 277V (LV) and (25°C), 4000K/5000K, typical CRI 80+. 3500K multiplier is 0.93. Frosted Lens, +/-10%. No lens Lens multiplier is 1.08.

## Flex Lighting Solutions

(+1) 913-851-3000  
 lighting@flex.com  
 www.flexlightingsolutions.com

7320 W 162nd St.  
 Overland Park, KS  
 66085, USA

7825 Ridgepoint Dr.  
 Irving, TX  
 75063, USA

6201 America Center Dr.  
 San Jose, CA  
 95002, USA